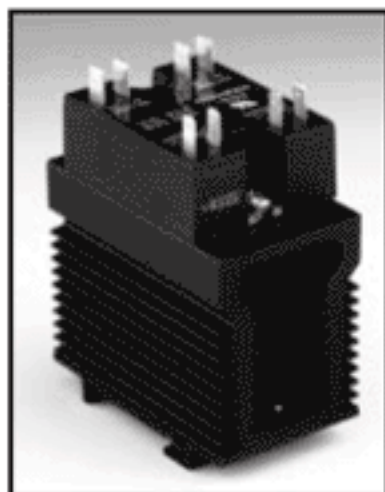





**NPH****Dual SSR DIN Rail Mount  
to 40 Amps AC @ 40°C Ambient****FEATURES:**

- Two independent DIN mountable SSRs in 1.80 inch width
- Standard relays approved to the following: UL and CE
- 250 Faston terminals for quick connection

PART NO.	INPUT RANGE	LOAD CURRENT (Amps AC)	LINE RANGE (VAC)	TRANSIENT OVER VOLTAGE	APPLICATION NOTES
HBC-D25HDA	4-15 VDC	.15 - 30	48-530 VAC	1200 V <sub>pk</sub>	• Load current 20 Amps maximum per pole
HBC-D40HDA		.15 - 40			
HBC-D25HEA	15-32 VDC	.15 - 30			
HBC-D40HEA		.15 - 40			

**NOTES:**

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult NPH Heaters for application information

**NPH****National Plastic Heater Sensor & Control Co.**

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433

Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com