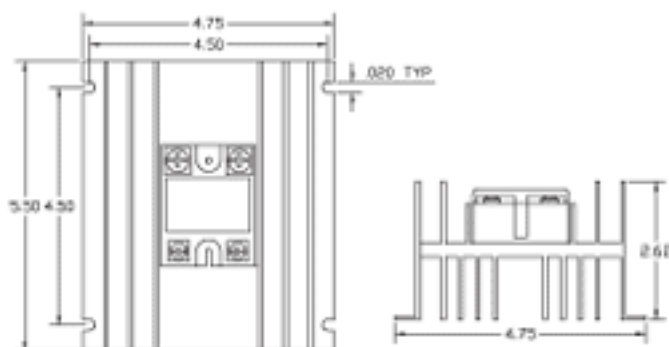



FEATURES:

- Standard relays approved to the following: UL, CSA, VDE and CE
- Finger-safe cover standard
- Zero voltage switching standard
- Optional DIN rail mount available (-DIN)
- Optional Voltage Transient Protection (MOV) available (-M)
- Optional phase control and random operation (-10)
- 600 VAC Line Voltage available

| PART NO. | INPUT RANGE | LOAD CURRENT | LINE VOLTAGE | TRANSIENT OVERVOLTAGE |
|------------|--------------|--------------|--------------|-----------------------|
| HBC-50DN | 3 - 32 VDC | 45A | 24-260 VAC | 600 V _{pk} |
| HBC-90DN | | 70A | | |
| HBC-50AN | 90 - 280 VAC | 45A | | |
| HBC-90AN | | 70A | | |
| HBC-50HDN | 3 - 32 VDC | 45A | 48-530 VAC | 1200 V _{pk} |
| HBC-90HDN | | 70A | | |
| HBC-125HDN | | 80A | | |
| HBC-50HAN | 90 - 280 VAC | 45A | | |
| HBC-90HAN | | 70A | | |
| HBC-125HAN | | 80A | | |


NOTES:

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult NPH Heaters for application information