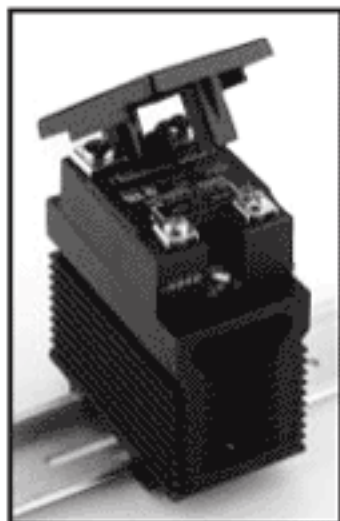
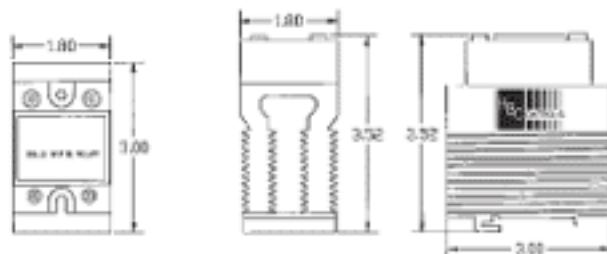


NPH**SSR DIN Rail Mount
to 60 Amps DC @ 40°C Ambient****FEATURES:**

- Standard relays approved to the following:
CE, UL (some models)
- Finger safe cover included
- Mosfet & Bipolar technology
- Parallel connectability (Mosfet only)
- Load suppression diode included

PART NO.	INPUT RANGE	LOAD CURRENT	LOAD VOLTAGE RANGE	COMMENTS		
HBC-DC60A5A	90-260 VAC	.02-5 ADC	3-60 VDC	Bipolar output - 4000V Isolation		
HBC-DC60A7A		.02-7 ADC				
HBC-DC60D5A	3.5-32 VDC	.02-5 ADC			0-200 VDC	Mosfet output - 2500V Isolation
HBC-DC60D7A		.02-7 ADC				
HBC-D2D12A		.02-10 ADC	0-400 VDC			
HBC-D4D12A		.02-15 ADC	0-100 VDC			
HBC-D1D20A						
HBC-D1D40A		.02-25 ADC	0-60 VDC			
HBC-D06D6A		.02-40 ADC				
HBC-D06D6A		.02-50 ADC				
HBC-D06D1A		.02-60 ADC				

**NOTES:**

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult NPH Heaters for application information
- 4) Cover adds approx. 0.4" to assembly height

NPH**National Plastic Heater Sensor & Control Co.**

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433
 Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com