


FEATURES:

- Standard relays approved to the following: UL, CSA, VDE and CE
- Finger-safe cover standard
- Optional DIN rail mount available (-DIN)
- Manual control potentiometer available (HBC-POT1)
- Voltage transient protection
- 4-20 MA or 0-10 VDC available
- 24 VAC power supply available (HBC-PS-120, HBC-PS-240, HBC-PS-480)

PART NO.	INPUT CONTROL	MAX. LOAD	LINE VOLTAGE	TRANSIENT OVERVOLTAGE
HCP-500N	4-20 MA	45A	24-280 VAC	600 V _{pk}
HCP-900N		70A		
HCP-50HDN		45A	48-530 VAC	1200 V _{pk}
HCP-90HDN		70A		
HCP-125HDN		80A		
HVP-500N	0-10 VDC	45A	24-280 VAC	600 V _{pk}
HVP-900N		70A		
HVP-50HDN		45A	48-530 VAC	1200 V _{pk}
HVP-90HDN		70A		
HVP-125HDN		80A		

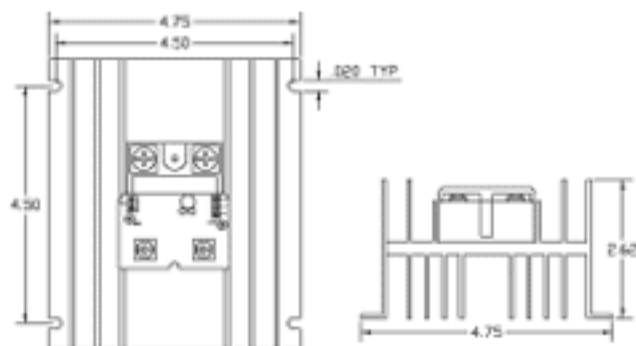

NOTES:

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult NPH Heaters for application information