


NPH


High Current Power Control (Zero Cross) to 80 Amps @ 40°C Ambient

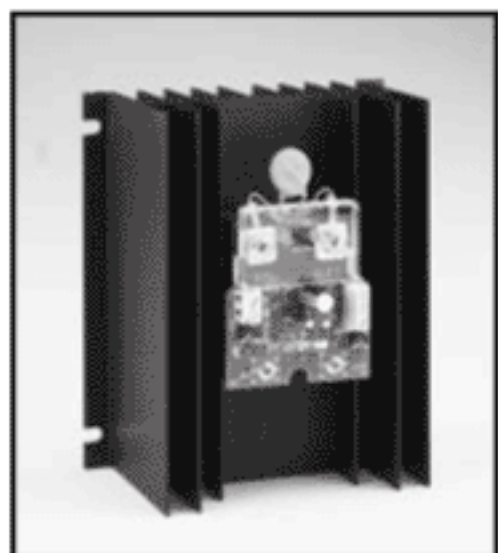

FEATURES:

- Standard relays approved to the following: UL, CSA, VDE and CE
- Finger-safe cover standard
- Manual control potentiometer available (HBC-POT1)
- Voltage transient protection
- 4-20 MA or 0-10 VDC available
- 24 VAC power supply available (HBC-PS-120, HBC-PS-240, HBC-PS-480)
- 600 VAC available

PART NO.	INPUT CONTROL	MAX. LOAD	LINE VOLTAGE	TRANSIENT OVERVOLTAGE
HCC-50DN	4 - 20 MA	45A	24-260 VAC	600 V _{pk}
HCC-90DN		70A		
HCC-50HDN		45A	48-530 VAC	
HCC-90HDN		70A		
HCC-125HDN		80A		
HVC-50DN	0 - 10 VDC	45A	24-260 VAC	600 V _{pk}
HVC-90DN		70A		
HVC-50HDN		45A	48-530 VAC	
HVC-90HDN		70A		
HVC-125HDN		80A		

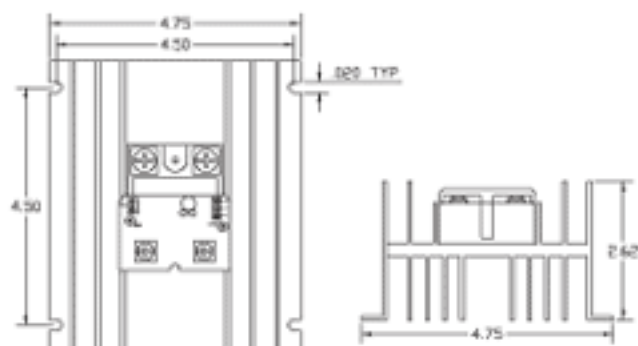

NOTES:

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult NPH Heaters for application information

NPH
National Plastic Heater Sensor & Control Co.

phone: 416.491.8436 toll free: 1.877.674.9744 fax: 416.491.2433
 Toronto, Ontario Canada e-mail: sales@nphheaters.com website www.nphheaters.com